


# Inductive voltage transformers

Outdoor operation  
Oil-paper insulated



EOF (24-245) kV

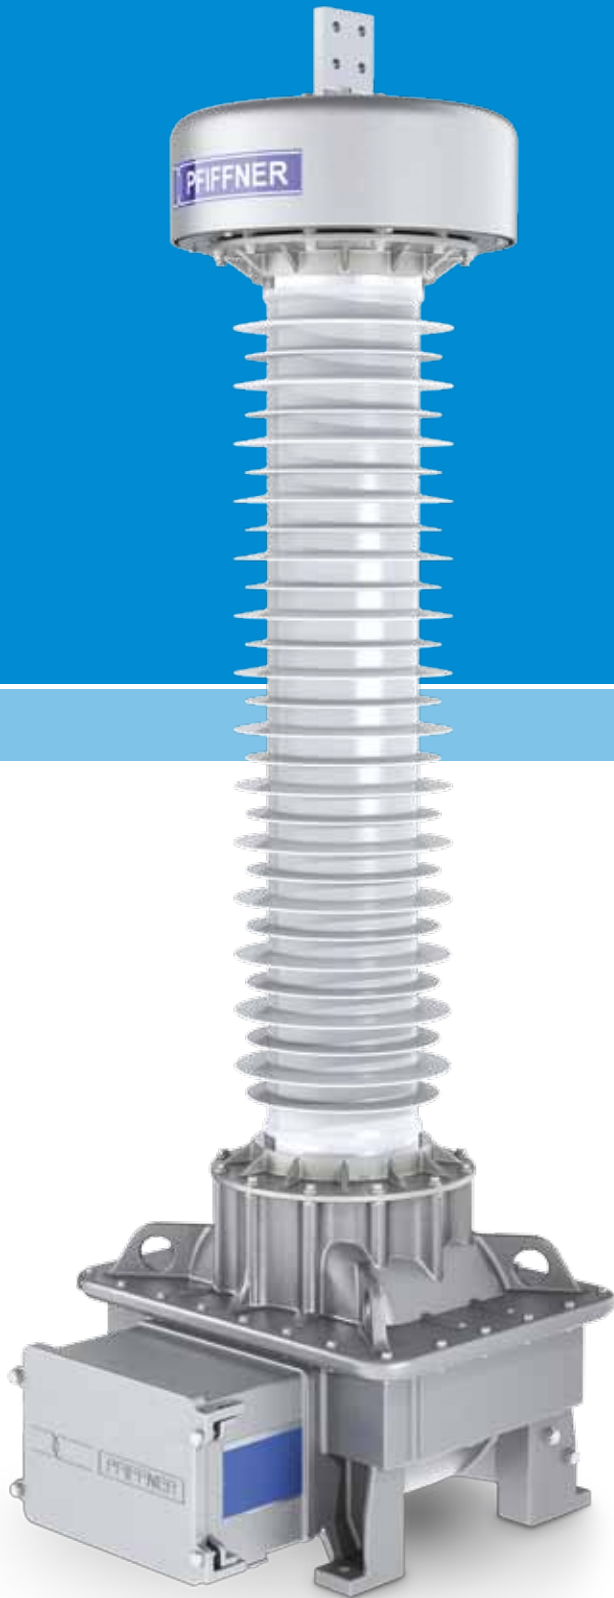

## General description

Voltage transformers type EOF are used in high voltage networks within the 24-245 kV range. They transform high voltage into standardised values for meters, measuring and protection devices.

The active part of the voltage transformer is located in the foot housing. The high voltage insulation is implemented in oil-paper technology. To achieve this, a high quality PCB-free mineral oil is used. The fine graded bushing is inside the insulator.

The expansion system is located in the head of the voltage transformer. This unit acts as volume compensation for the oil in case of temperature variations. For voltage transformers of 24-72 kV, a highly flexible, temperature-resistant membrane made from fluoroelastomers (VITON®) is used. Voltage transformers > 72 kV have an expansion cell made of stainless steel. The oil level is indicated by a mechanical system in the window of the bellows cover.

All metal housings and flanges are made from a special aluminium alloy. These parts can be colour coated on request.

All voltage transformers have either a high-quality porcelain or a high-grade silicone composite insulator. Different creepage distances are available according to the different pollution classes, as specified in the standards.

The hermetic sealed housing protects the oil-paper insulation against atmospheric influences.

The generously sized terminal box has a cover which can be opened sideways. This allows easy connection of the secondary cables. The terminal box has a flange without holes by default. Cable glands, circuit diagram and individual safety instructions can be preinstalled on request.



### Advantages of inductive voltage transformers

- Protection of the secondary winding from transient overvoltages in the high-voltage network through capacitively coupled shielding
- Protection against occurring ferroresonance through low operating inductance in the iron core
- High operating safety as there are no active parts in the insulator
- Minimum oil volume through optimised design
- Ambient temperature -40... +40 °C



# Highlights




Fine graded bushing

- The fine graded bushing is designed to ensure an optimum distribution of the electric field.
- The bushing is fixed in a way, that it is short-circuit-safe and secondary arcs are prevented.



Excellent protection against moisture


- The inner side of the instrument transformer is protected against moisture by means of special sealing rings.
- All housings are designed with a drain-age area to protect the sealing surfaces of the housings against rain. This significantly reduces crevice corrosion.
- The housing elements are connected with special stainless steel screws. They are designed in such a way that no humidity can enter the screw hole.

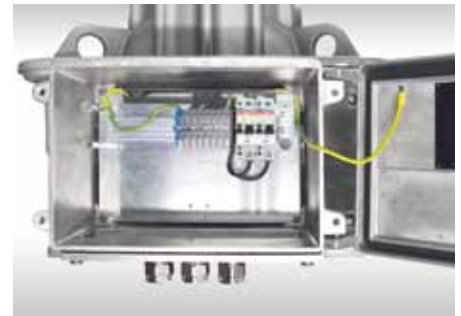

Installation-friendly terminal box



- The generously sized terminal box with a cover that can be opened sideways, is secured with captive screws. It can accommodate terminal blocks, fuses, additional auxiliary contacts, and sealable covers.
- By default, all terminal boxes have a flange without holes. Cable glands can be preinstalled on request.
- An additional terminal box can be supplied on request.

# Design

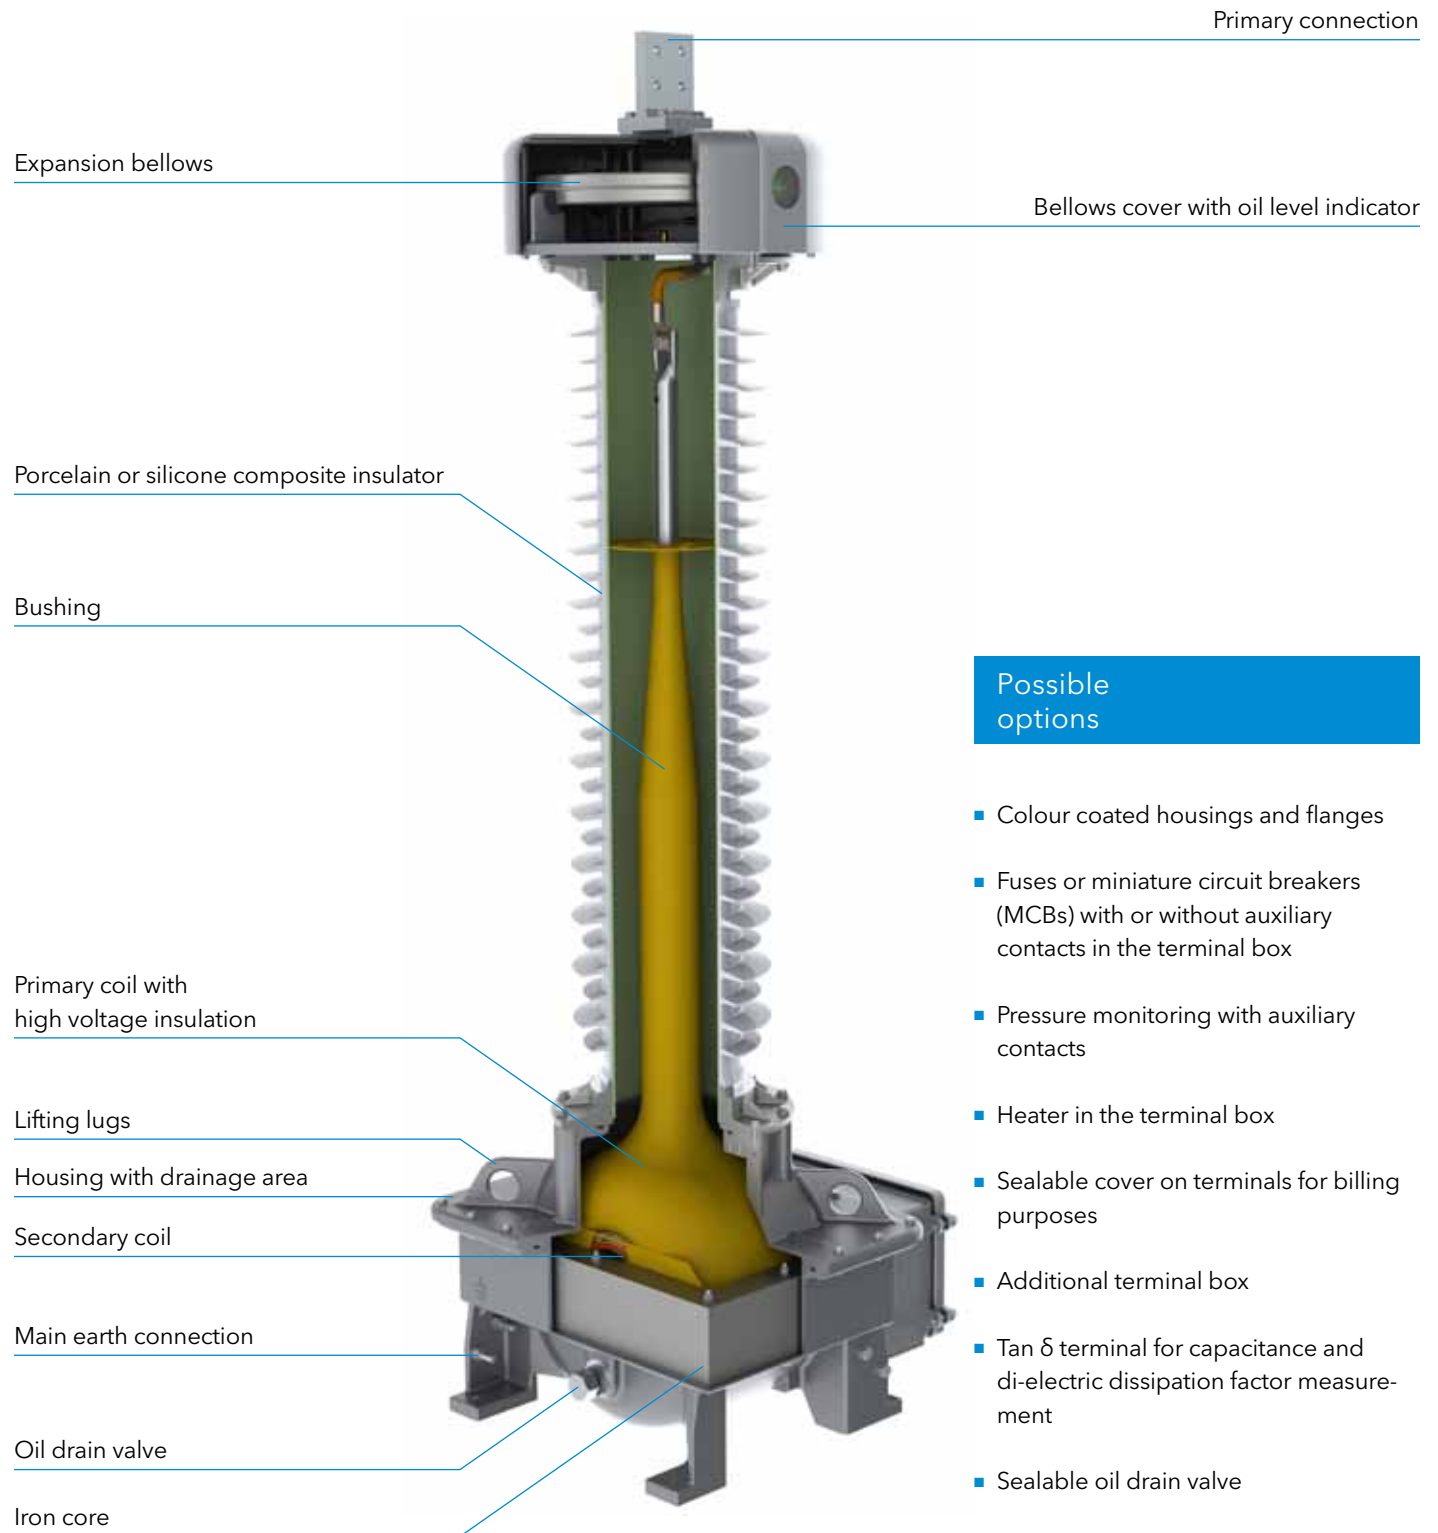


# Technical data


123-170 kV

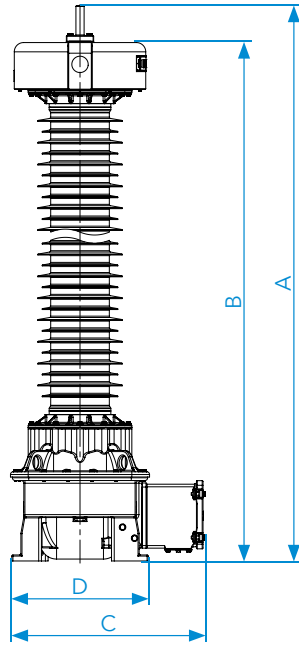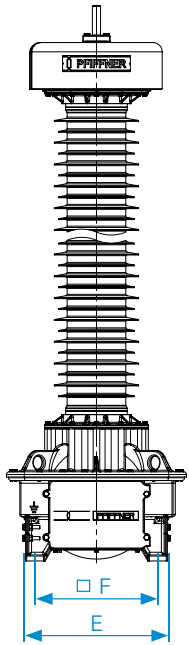

24-72 kV



245 kV

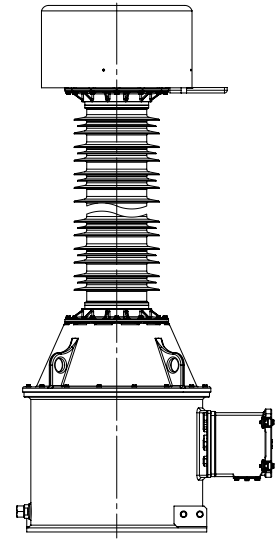

Type EOF		24	36	52	72	123	145	170	245
Standard		IEC/IEEE							
Highest voltage for equipment	kV	24	36	52	72.5	123	145	170	245
Rated power-frequency withstand voltage	kV	50	70	95	140	230	275	325	460
Rated lightning impulse withstand voltage	kV	125	170	250	325	550	650	750	1050
Frequency	Hz	16.7/50/60							
Accuracy class		0.1-3; 3P; 6P							
Rated thermal limiting output	VA	≤ 1500				≤ 3000			
Max. simultaneous burden (cl. 0.2)	VA	200				300			
Max. number windings		5							

Type EOF		24	36	52	72	123	145	170	245
Height of unit*	A inch	43.6	43.6	56.3	56.3	83.3	94.2	101.6	138.1
Height to primary terminal*	B inch	40.4	40.4	53.1	53.1	77.8	88.7	96.1	126.2
Depth of unit including terminal box	C inch	20.7	20.7	20.7	20.7	28.0	28.0	28.7	36.9
Depth of unit base	D inch	14.2	14.2	14.2	14.2	19.7	19.7	19.7	26.0
Width of unit base	E inch	14.2	14.2	14.2	14.2	20.5	20.5	20.5	26.0
Distance between screw holes at base	F inch	12.2	12.2	12.2	12.2	17.7	17.7	17.7	23.6
Min. creepage distance*	inch	37.4	37.4	73.2	73.2	121.3	153.5	173.0	242.5
Approximate weight*	lb	253.0	253.0	275.0	275.0	671.0	726.0	737.0	770.0

\* with standard composite silicone insulator, creepage distance 0.98 inch/kV

# Global presence

## **PFIFFNER Instrument Transformers Ltd**

5042 Hirschthal  
Switzerland

Phone +41 (0)62 7392828  
Fax +41 (0)62 7392810  
E-Mail [sales@pmw.ch](mailto:sales@pmw.ch)  
Internet [www.pfiffner-group.com](http://www.pfiffner-group.com)

## **PFIFFNER Transformatör A.S.**

06750 Akyurt/Ankara  
Turkey

Phone +90 (0)31 28475521  
Fax +90 (0)31 28475421  
E-Mail [info@pfiffner.com.tr](mailto:info@pfiffner.com.tr)  
Internet [www.pfiffner.com.tr](http://www.pfiffner.com.tr)

## **PFIFFNER do Brasil Ltda**

88307-740 Itajaí  
Brazil

Phone +55 (0)47 33481700  
Fax +55 (0)47 33481700  
E-Mail [pfiffner@pfiffner.com.br](mailto:pfiffner@pfiffner.com.br)  
Internet [www.pfiffner.com.br](http://www.pfiffner.com.br)

## **PFIFFNER Deutschland GmbH**

25524 Itzehoe  
Germany

Phone +49 (0)48 21408270  
Fax +49 (0)48 214082729  
E-Mail [sales@pfiffner-messwandler.de](mailto:sales@pfiffner-messwandler.de)  
Internet [www.pfiffner-messwandler.de](http://www.pfiffner-messwandler.de)

## **MGC Moser-Glaser AG**

4303 Kaiseraugst  
Switzerland

Phone +41 (0)61 4676111  
Fax +41 (0)61 4676110  
E-Mail [info@mgc.ch](mailto:info@mgc.ch)  
Internet [www.mgc.ch](http://www.mgc.ch)

## **ALPHA Elektrotechnik AG**

2560 Nidau  
Switzerland

Phone +41 (0)32 3328700  
Fax +41 (0)32 3312679  
E-Mail [mail@alpha-et.ch](mailto:mail@alpha-et.ch)  
Internet [www.alpha-et.ch](http://www.alpha-et.ch)

This document has been drawn up with the utmost care.  
We cannot, however, guarantee that it is entirely  
complete, correct or up-to-date.

© Copyright PFIFFNER  
Subject to change without notice.

2015.12



MANUFACTURER OF INSTRUMENT TRANSFORMERS SINCE 1927

HIGH VOLTAGE

MEDIUM VOLTAGE

LOW VOLTAGE